

## PCC825B

**Prime Power: 600KW/750KVA Standby Power: 660KW/825KVA Voltage: 400VAC**  
**Powered by Cummins KTA38-G2 Engine**

### Genset Performance

- 230/400VAC, 50Hz, 0.8PF, 3 Phases 4 wires
- Frequency drop  $\leq 3\%$
- Voltage regulation  $\leq 0.3\%$
- The steady state frequency  $\leq 0.5\%$
- The steady state voltage deviation  $\leq \pm 1\%$
- The transient frequency deviation  $\leq +10\% \leq -15\%$
- The transient voltage deviation  $\leq +20\% \leq -15\%$
- Frequency recovery time  $\leq 3S$
- Voltage recovery time  $\leq 1S(\text{Voltage} \pm 3\%)$
- THF (Telephone Harmonic Factor)  $< 3$
- TIF (Telephone Influence Factor)  $< 50$   
Comply to Standard NEMA MG1-22.43
- Built-in vibration isolator with high performance on shock absorption.

### Standard Configuration

- Cummins Engine
- Brushless synchronous alternator
- POWERTEC intelligent controller
- 40°C standard ambient temperature (50°C Optional)
- Molded case circuit breaker (3P)
- Float battery charger
- Battery connect wire
- Steel base frame
- Silencer, bellows, exhaust bend
- Manual book and files

### Optional Items

- Starting batteries
- Fuel tank
- Oil-water separator
- Sensor for low coolant level, low fuel/oil level
- Automatically monitoring & controlling system of city power
- Coolant heater
- Oil heater
- Heat exchanger--Water cooled tower system
- Soundproof canopy
- Trailer
- 20GP or 40HQ container type canopy
- Design and construction of environmental protection
- Engineering for the Genset room



## Diesel Engine

- Model: **Cummins KTA38-G2**
- Construction: replaceable wet type cylinder block has excellent radiation. Mature standard spare parts commonly apply to other engine in this series. Cylinder block and head will have no fault with the designment of internal oil passage and compact structure
- Cooling system: Adopt gear centrifugal water pump to cool down water temperature. With large flow channel designmeng ,it has good cooling performance;
- Fuel system: Cummins patented technology (PT) fuel system optimizes combustion and reduces emission;
- Environment: The engine can work normally under the following conditions without de-rating:
  - A. 1800r/min engine--altitude less than 1500m (5000ft), ambient temperature less than 40 °C(104° F).
  - B. 1500r/min engine--altitude less than 1310m (4300ft), ambient temperature less than 40 °C(104° F)But engine working environment conditions exceed above, the engine output power will de-rate 4% as altitude increase each 300m(1000ft) at the altitude is higher than 1500m (5000ft), Also it will de-rate 2% as temperature increase every 11 °C(1% de-rating ,when temperature increase each 10° F ). in the ambient temperature is higher than 40°C(104° F)



## Alternator

- Optional brands: **Stamford / Marathon / Faraday / Engga / Mecc Alt**
- Brushless, 4 pole rotating magnetic field, single bearing with protective cover.
- Insulation: H Class.
- IP Class: IP23
- Cooling system
- AC exciter, rotate rectifying
- Rotor and exciter made with high temperature insulating resin, to satisfy tough environment.
- Rotor dynamic balancing complys for BS5625, class 2.
- Sealed with advanced lubricating grease to prolong life of bearing.



**Notes: Above data of alternator comes from Stamford. Specification may alternated without advance notice.**

## Standard

- 3 phases voltage:  $U_a, U_b, U_c$
- Frequency F1
- Apparent power PR
- Power factor PF
- Coolant temperature WT
- Temperature  $^{\circ}\text{C}$  display
- Oil pressure OP
- Engine speed
- 3 phases current:  $I_a, I_b, I_c$
- Active power PA
- Power factor PF
- Temperature  $^{\circ}\text{C}$  display
- KPa/Psi/Bar display
- Battery voltage V
- Running Hour
- Starting timer:(999999)



## Standard Protection

### Genset Protection

- Programmable I/O signal
- Emergency stop

### Engine Protection

- Stop for over speed
- Low oil pressure
- High Coolant temperature
- Sensor fail
- Alarm for low/high battery voltage
- Low battery voltage
- Fail to start/Cranking fail

### Alternator Protection

- Over Voltage
- Over current
- Voltage signal lost
- Over Voltage
- Over frequency
- Under frequency

### Control System Components

- Manual/auto/stop/start
- Setting button
- Fault status indicators
- Screen menu selection button
- Emergency stop button
- Digital displayer



## Communication Interface (Option)

- International standard MODBUS communication protocol RS232/ RS485 is suitable for remote control and monitor; It is easy integrated with SCADA;

**Notes: Above data of controller comes from POWERTEC GC6110. Customized solutions is available as required**

## Genset

|                     |         |
|---------------------|---------|
| Model               | PCC825B |
| Prime Rating (kw)   | 600     |
| Standby Rating (kw) | 660     |
| Rate voltage(V)     | 400     |
| Rate current(A)     | 1083    |
| Power factor        | 0.8     |
| Frequency(Hz)       | 50      |

## Engine



|                                     |                                  |
|-------------------------------------|----------------------------------|
| Engine Model                        | KTA38-G2                         |
| Gross Engine output-Prime (kw)      | 664                              |
| Gross Engine output-Standby (kw)    | 731                              |
| Bore * stroke (mm)                  | 159*159                          |
| Cylinders and structure             | 6 In line                        |
| Displacement(Liter)                 | 38                               |
| Compression Ratio                   | 14.5:1                           |
| Intake way                          | Turbocharged/Air-Air intercooler |
| Max intake resistance (KPa)         | 6.23                             |
| Air intake (m3/h)                   | 4928                             |
| Max exhaust back pressure (KPa)     | 10                               |
| Exhaust gas flow (m3/h)             | 13244                            |
| Exhaust temp (°C)                   | 502                              |
| Cooling way                         | Water Radiator & Fan             |
| Fan exhaust flow (m3/min)           | 573                              |
| Coolant capacity (L)                | 303                              |
| Highest water temperature(°C)       | 104                              |
| Minimum air opening to room (m2)    | 5.8/4.5                          |
| Thermostat range (°C)               | 82-93                            |
| Max oil temperature (°C)            | 121                              |
| Lubrication system oil capacity (L) | 135                              |
| Rate load fuel consumption(L/H)     | 167                              |
| Standard Governor/Class             | Electronic                       |

## Alternator

|                        |                         |
|------------------------|-------------------------|
| Rated Voltage(V)       | 400/230                 |
| Output Way             | 3 Phases, 4 wires       |
| Rated power factor     | 0.8                     |
| Exciter                | Brushless, Self-exciter |
| Max voltage regulation | ±1%                     |
| Phase                  | 3                       |
| Protection class       | IP21-23                 |
| Insulation class       | H                       |

## Controller

|       |                 |
|-------|-----------------|
| Brand | POWERTEC GC6110 |
|-------|-----------------|

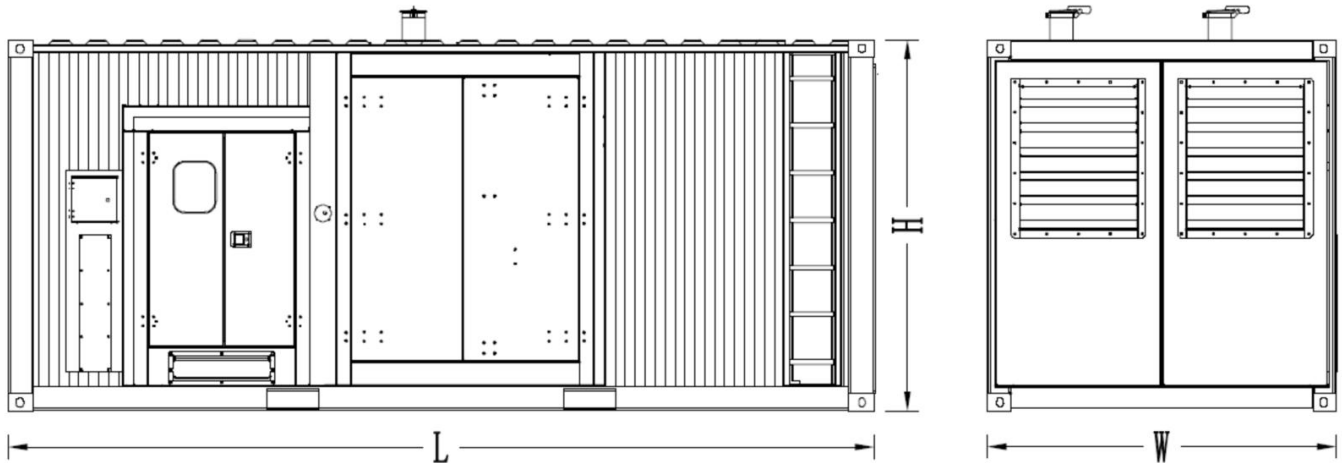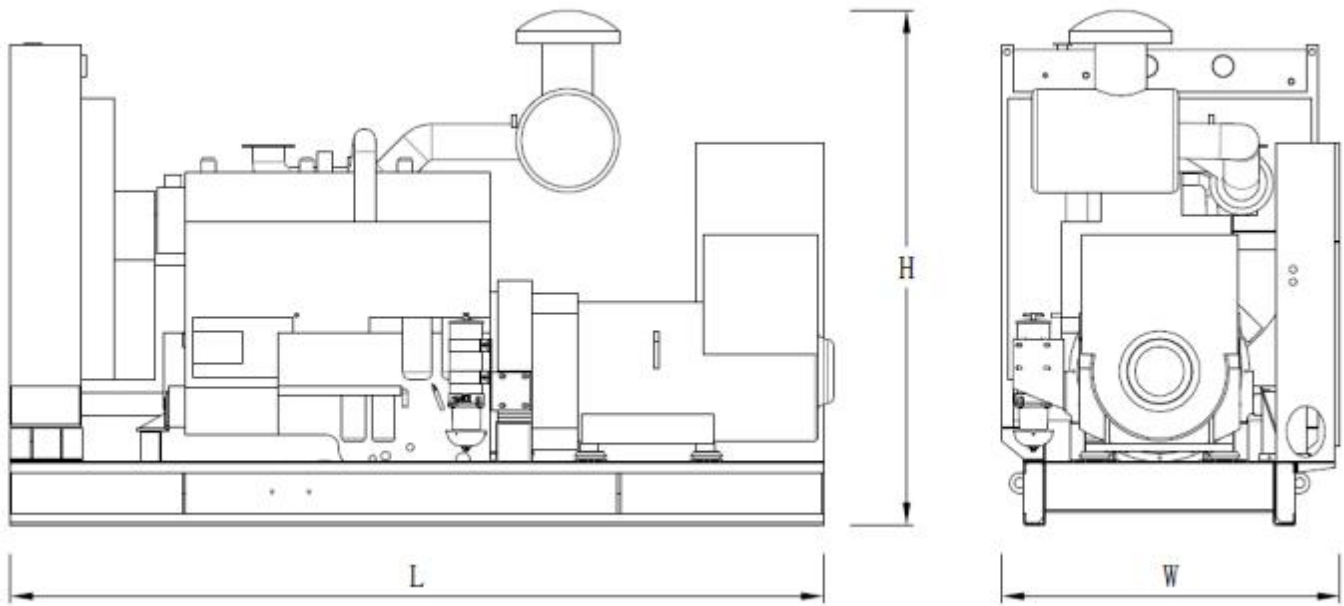

| Type        | Dimension (mm)<br>(L*W*H) | Weight<br>(kg) | Fuel Tank Capacity<br>(L) |
|-------------|---------------------------|----------------|---------------------------|
| Open Type   | 4225*1805*2467            | 6799           | -                         |
| Silent Type | 6058*2438*2591            | 10559          | 1500                      |

## Contact Us

### Powertec Generator System Co., Ltd

**Add:** Danshui Yanna Industry Zone, Huiyang, Huizhou, Guangdong, China  
**Tel:** +86 752-3911119 / 3911118  
**Fax:** +86 752-3911110  
**Web:** [www.powertec.com.cn](http://www.powertec.com.cn)  
**Email:** [powertec@powertec.com.cn](mailto:powertec@powertec.com.cn)