

POWERTEC Generator Set

Powered by Perkins 403A-15 Engine

Model: PPE20 Prime Power: 12KW/15KVA Standby Power: 13KW/20KVA

Genset Fundamental Characteristics

- ◆ 230/400VAC, 50HZ 0.8PF 3 Phases, 4 wires output
- ◆ Frequency drop $\leq 3\%$
- ◆ Voltage modulation $\leq 0.3\%$
- ◆ The steady state frequency $\leq 0.5\%$
- ◆ The steady state voltage deviation $\leq \pm 1\%$
- ◆ The transient frequency deviation $\leq +10\% \leq -15\%$
- ◆ The transient voltage deviation $\leq +20\% \leq -15\%$
- ◆ Frequency recovery time $\leq 3S$
- ◆ Voltage recovery time $\leq 1S(\text{Voltage} \pm 3\%)$
- ◆ THF (Telephone Harmonic Factor) < 3
- ◆ TIF (Telephone Influence Factor) < 50
- Comply to Standard NEMA MG1-22.43
- ◆ Standard equipped with ambient temperature 40°C
Connecting radiator
- ◆ Inbuilt shock absorber has high performance on shock absorption.
It's easy to be transported and installed without embedding and
Fixing rubber shock pad between the genset and ground

Genset Optional Configuration

- ◆ 24V Starter Batteries
- ◆ Daily Fuel Tank
- ◆ Oil-water separator
- ◆ Warning function of low water level, low fuel oil
- ◆ Automatically monitoring & controlling system of city power
- ◆ Coolant heater
- ◆ Oil heater
- ◆ Heat exchanger--Water cooling Tower System
- ◆ Soundproof Canopy/ Trailer
- ◆ ISO container
- ◆ Design and construction of environmental protection
Engineering for the Genset room

Genset Standard Configuration

- ◆ Perkins Engine
- ◆ Brushless synchronous alternator
- ◆ POWERTEC intelligent controller
- ◆ 40°C standard ambient temperature
Water radiator
- ◆ Modularized case circuit breaker (3P)
- ◆ Float Battery Charger
- ◆ Battery connect wire
- ◆ Steel base frame(include shock absorbers)
- ◆ Bottom oil tank
- ◆ Bellows、exhaust bend
- ◆ Manual book and files



Performance Description of Diesel Engine

- ◆ Model: **Perkins 403A-15**
- ◆ Construction: Forged steel crankshaft, cast iron steel body and Replaceable wet cylinder liner, two/four valves per cylinder
- ◆ Intake: Naturally aspirated;
- ◆ Fuel system: Mechanically regulated embedded fuel injection pump, non-direct injection
- ◆ Lubrication system: Wet steel sump oil injector and dip stick
- ◆ Cooling system: Thermostatically-controlled system with belt driven coolant pump and pusher fan; mounted radiator, piping and guards
- ◆ Filtration system: Embedded air filter split fuel filter spin-on full-flow Oil filter
- ◆ Electrical equipment: 12V starter and 12V, 15A alternator (DC output); Oil pressure switch and water temperature control switch; 12V shutdown solenoid, activated; Glow plug Cold start assist device and heater/starter switch;
- ◆ Lower operating cost: certified, bio-diesel with a concentration of up to 20% can be used; the standard interval for Changing the oil and the core is set to 500 hours (depending on the load system); high durability and reliability, Extended warranty and easy installation procedures
- ◆ Engine Operating Environment Description:
The engine can work under the following conditions without modulating power:
1800r/min engine--altitude less than 1000 m, ambient temperature less than 40 °C
1500r/min engine--altitude less than 1000 m, ambient temperature less than 40 °C



Performance Description Alternator

- ◆ Optional Alternator: **Stamford / Marathon/ Faraday/Engga/Mecc Alt**
- ◆ Brushless, 4 pole rotating magnetic field, single bearing with protective cover
- ◆ Insulation: H Class.
- ◆ Standard IP23 grade
- ◆ Cooling system
- ◆ AC exciter, rotate rectifying unit
- ◆ Surface of stator winding is covered with damp-proof epoxy Insulation varnish after impregnation proceeding
- ◆ Rotor and exciter is proceeded with high temperature insulating resin, Will be more applicable for harsh environment.
- ◆ Rotor dynamic balancing comply to standard BS5625, class 2.5
- ◆ Sealed with advanced lubricating grease prolongs life of bearing.



Notes: Above data of alternator comes from Stamford. Proper specification is subject to the practice alternator if customers choose other alternator

Standard Detection Function

- ◆ 3 phases voltage U_a, U_b, U_c
- ◆ Frequency F_1
- ◆ Apparent power PR
- ◆ Coolant temperature WT
- ◆ Oil pressure OP
- ◆ Speed RPM
- ◆ HC timer 99999 hours records
- ◆ Maximum cumulative times of starting can reach 999999
- ◆ 3 phases current I_a, I_b, I_c
- ◆ Active power PA
- ◆ Power factor PF
- ◆ Temperature $^{\circ}C$ display
- ◆ $KPa/Psi/Bar$ display
- ◆ Battery voltage V



Standard Protection Function

Genset Protection

- ◆ Programmable alarm and status input
- ◆ Emergency stop

Engine Protection

- ◆ Stop for over speed
- ◆ Alarm/Stop for low oil pressure
- ◆ Alarm/Stop for coolant high temperature
- ◆ Stop for failure to start/jigger
- ◆ Indication of sensor fault
- ◆ Alarm for low/high battery voltage
- ◆ Alarm for shortage of battery

Alternator Protection

- ◆ Stop for over high/low voltage
- ◆ Alarm/stop for over current
- ◆ Stop for loss of voltage detection signal
- ◆ Stop for over frequency
- ◆ Stop for low frequency

Control System Components

- ◆ Control switch—manual/auto/stop/start
- ◆ Screen menu selection button
- ◆ Setting button
- ◆ Fault status indicators
- ◆ Emergency stop button
- ◆ Digital display




Communication Interface

(optional function)

- ◆ International standard MODBUS communication protocol with error detection as well as RS232/ RS485 (RS485 is opto-isolated type) has functions of remote control, telemetry and telesignalling, which are facilitate to monitor genset.

Notes: Above data of controller comes from POWERTEC GC6110. Proper specification is subject to customers' practice controller if other controller is selected.

| Genset | Model | PPE20 |
|------------------------|-------------------------------------|---|
| | Prime Rating (kw) | 12 |
| | Standby Rating (kw) | 13 |
| | Prime current(A) | 22 |
| Frequency(hz) | 50 | |
| Engine & Alternator | Engine Model | 403A-15 |
| | Gross Engine output-Prime (kw) | 13 |
| | Gross Engine output-Standby (kw) | 15 |
| | Bore * stroke (mm) | 84*90 |
| | Cylinders and structure | 3 In line |
| | Displacement(Liter) | 1.496 |
| | Compression Ratio | 22.5:1 |
| | Intake way | Naturally aspirated |
| | Max intake resistance (KPa) | 6.4 |
| | Air intake (m3/h) | 66 |
| | Max exhaust back pressure (KPa) | 10.2 |
| | Exhaust gas flow (m3/h) | 132 |
| | Exhaust temp (°C) | 470 |
| | Cooling way | Water Radiator & Fan |
| | Fan exhaust flow (m3/min) | 36.6 |
| | Coolant capacity (L) | 6 |
| | Highest water temperature(°C) | 112 |
| | Minimum air opening to room (m2) | 1.0/0.75 |
| | Thermostat range (°C) | 82-95 |
| | Max oil temperature (°C) | 125 |
| | Lubrication system oil capacity (L) | 6 |
| | Fuel consumption(L/H) | 5 |
| | Standard Governor/Class | Mechanical |
| | Optional Alternator Model | Marathon--- GM-12-4 Engga----- EG180-40N Stamford---- S0L1-P1 Faraday----- FD1D1-4 |
| | Rated Voltage(V) | 400/230 |
| | Output Way | 3 Phases, 4 wires |
| | Rated power factor | 0.8 |
| | Exciter | Brushless, Self-exciter |
| Max voltage regulation | ±1% | |
| Phase | 3 | |
| Protection class | IP21-23 | |
| Insulation class | H | |
| Controller | Brand and Model | POWERTEC GC6110 |

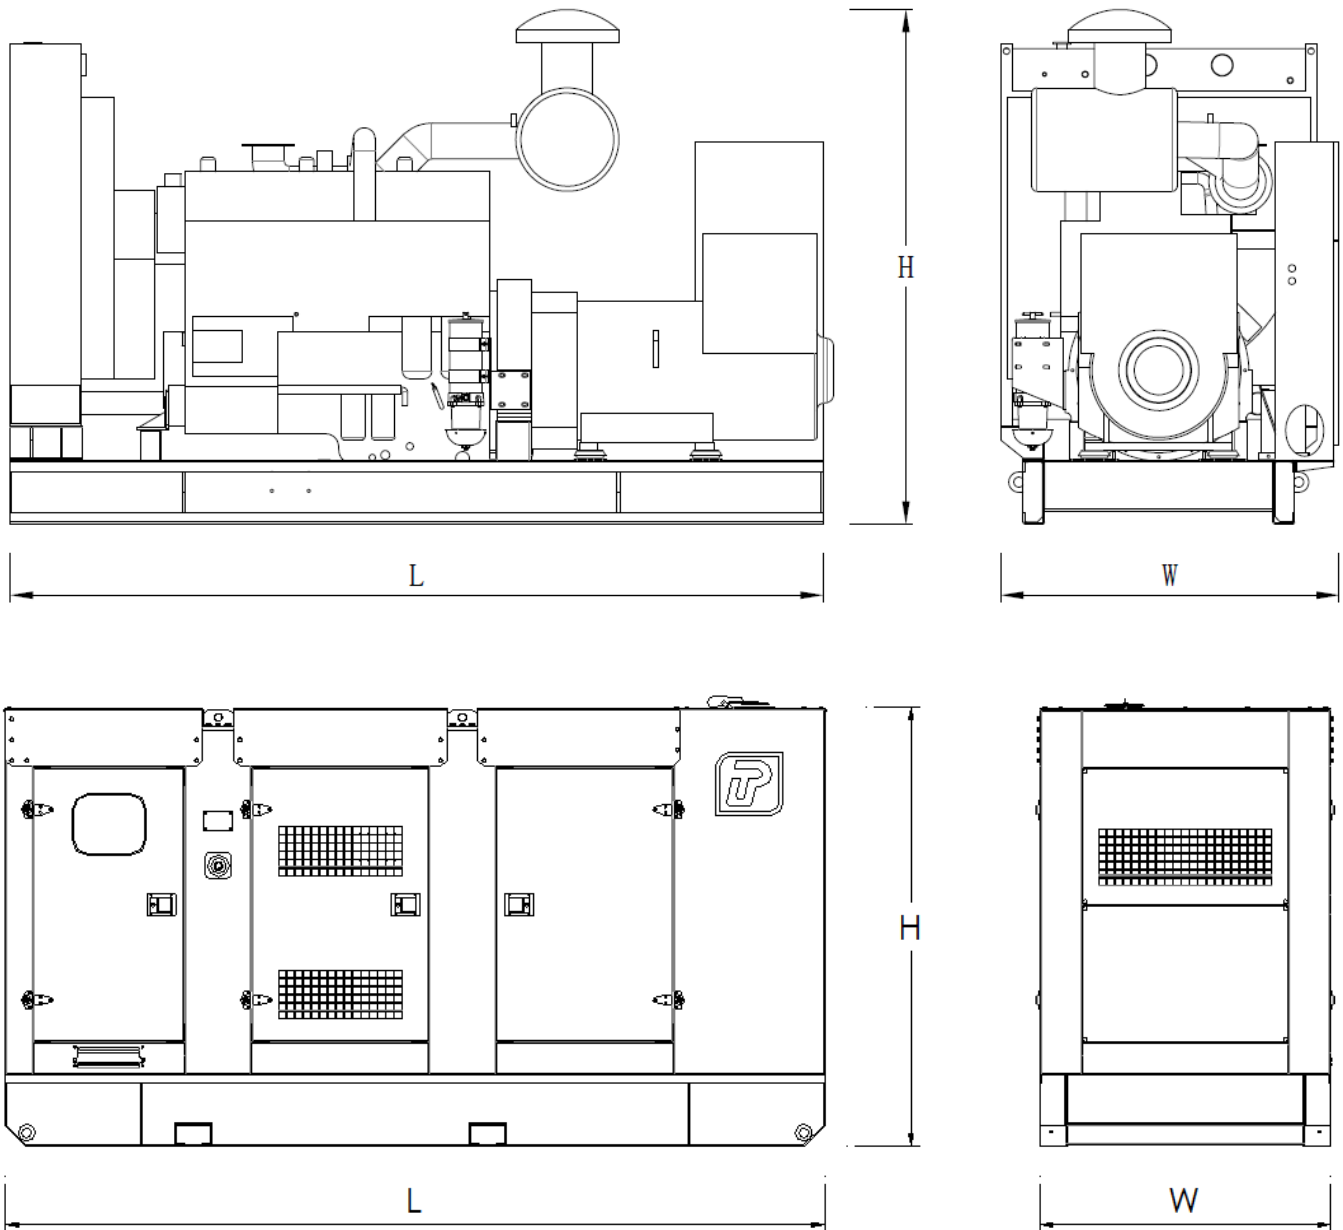

| Type | Dimension mm (L*W*H) | Weight KG | Fuel Tank Capacity L |
|-------------|----------------------|-----------|----------------------|
| Open Type | 1650*760*923 | 500 | 50 |
| Silent Type | 2300*900*1550 | 1050 | 250 |

Notes: Above data are for reference only. Specific size is subjected to actual measurement.

Contact Way

Powertec Generator System Co., Ltd

Add: Danshui Yanna Industry Zone, Huiyang, Huizhou, Guangdong, China

Tel: 0752-3911119 / 0752-3911118

FAX: 0752-3911110

Web: www.powertec.com.cn Email: sales@powertecgs.com